

The Best Way to Cut Strips – Set M

Measuring Strips Without Numbers

Review general instructions on inside front cover and pages 5 and 6. Please note that the measuring template and cutting templates may be different. The measuring template should have the longest parallel sides possible: one to go on the trued edge and the other, against the ruler.

Diagram 1. Use Template 74 to measure and cut strips for cutting Templates 73 and 74.

Diagram 2. To cut the right triangle that is included on Template 74, first cut $3\frac{1}{8}$ " (7.9 cm)-wide strips. For matching triangles, place the fabrics right side up before cutting strips; for mirror images, place strips right sides together. Cut the strips into $6\frac{1}{8}$ " (15.6 cm) rectangles. Cut them in half on the diagonal, as shown. Align the bottom of Template 74 with the bottom edge of the triangles; the placement line should fit the angled cut of the triangles. Nip the corners to complete cutting the triangles.

Diagram 3. To measure and cut strips for use with Template 73a, turn the template as shown and align the guideline with the raw edge of the fabric.

Diagram 4. When you want the hypotenuse of Template 73 on the straight grain, turn the template as shown to cut strips.

Diagram 5. Use Template 74 or 75 to measure and cut strips to use with Templates 74, 75, 76

Diagram 1 – Templates 73 and 74

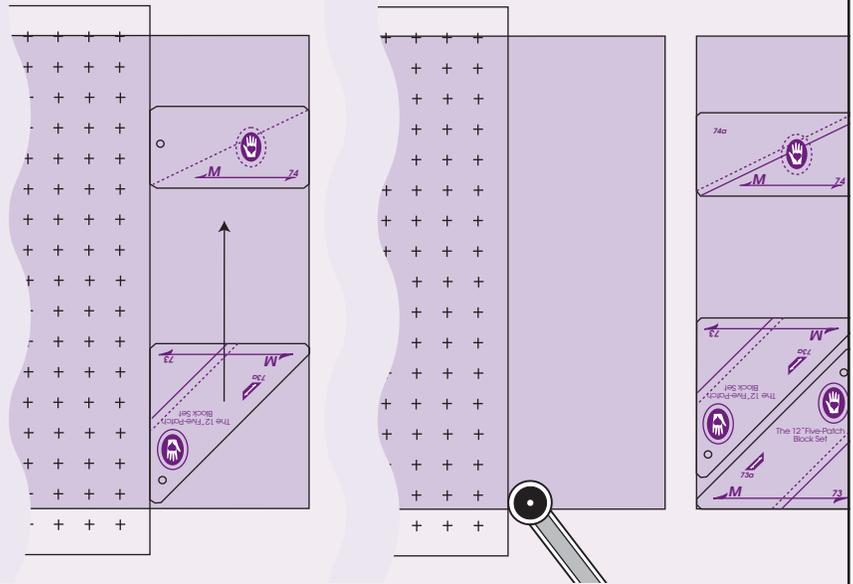


Diagram 2 – Template 74a

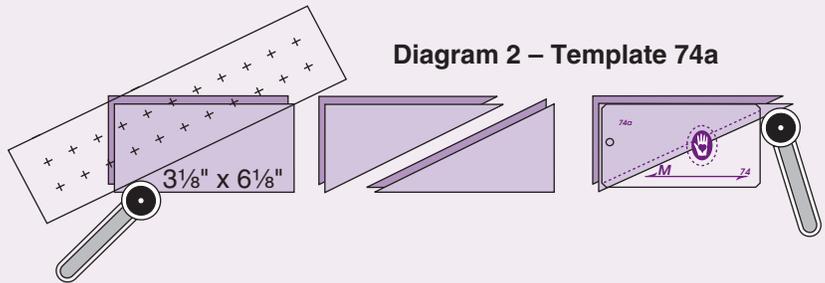


Diagram 6. To place the straight grain on the hypotenuse of Template 77, cut strips $1\frac{3}{4}$ " (4.4 cm) wide.

Diagram 3 – Template 73a

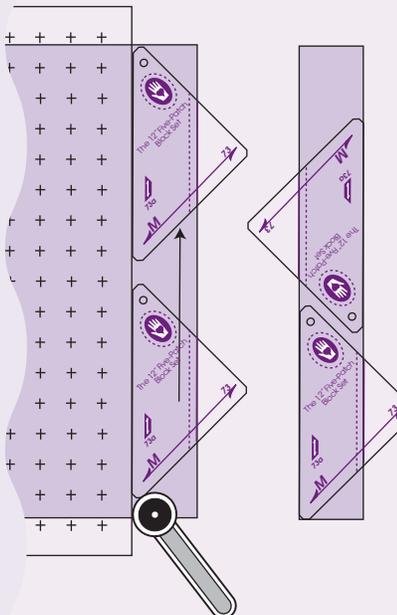


Diagram 4 – Template 73

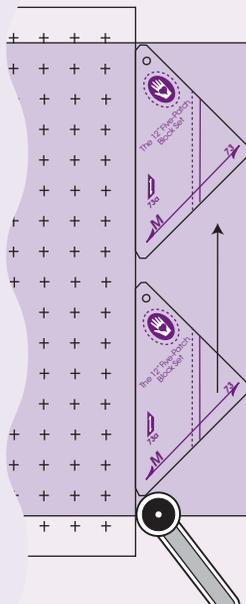


Diagram 5
Templates 74, 75, 76, 77

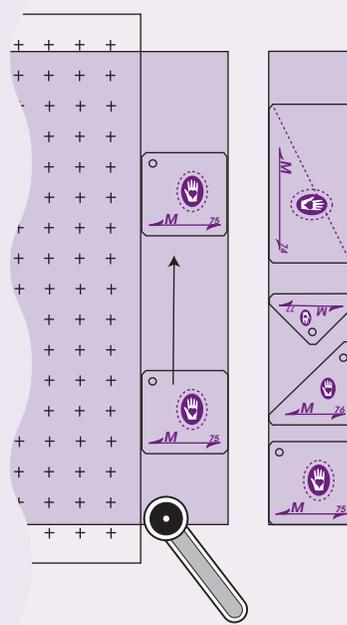


Diagram 6
Template 77

